

# WiFi Digital Heating Thermostat User Manual

Many thanks for your selection of our products and services, and also for your trust and support to us.

Search for "Smart life" from google play or App store to Download the Wifi App



- Turn on the thermostat, press and hold the key combination “ ” and “ ” Activate WIFI distribution network icon

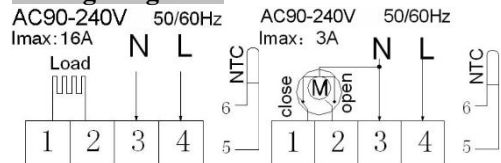
## Features

- (A) Including built-in sensor and external sensor
- (B) 0.5°C accuracy keeps temperature within the level you set.
- (C) Children lock to prevent misoperation by children
- (D) Data memory when power is off.
- (E) Holiday mode make you enjoy more comfortable temperature in holiday
- (F) The temperature of external sensor can be checked


## Product Specifications

- ☆Power: 90-240Vac 50/60Hz ☆Range of temperature display: 1~70°C
- ☆Display accuracy: 0.5°C ☆Insulating condition: Normal environment
- ☆Probe sensor: NTC(10k)1% ☆Running program: Set per 1 week as a cycle
- ☆Contact capacity: 3A/(WW);16A/(WE) ☆Output: Switch relay
- ☆ Limit temperature range: 1~70°C ☆Installation: recessed type (in the wall)
- ☆Range of temperature adjustment: 5~35°C ☆Size(mm): 86\*86\*27

## Wiring Diagram

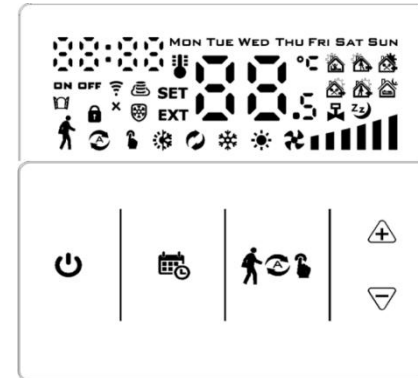


Electric heating wiring diagram Water heating wiring diagram  
(do not connect terminal "close 4" of electric valve)



Water heating and gas wall-hung boiler heating, nocontact wiring diagram, (disconnection when electric valve close)  
**Note: 5&6 connect with gas boiler ,3&4 connect with N and L line . If normally closed thermal actuator ,then connect with 2&3,if normally open thermal actuator ,then connect with 1&3**

## Displays









## Description of icon





- Auto mode; run preset program Manual mode
- Programming mode Temporary manual mode
- Holiday mode, Holiday days and temperature can be set to run in countdown mode
- Heating, icon disappears to stop heating External NTC sensor
- WIFI connection, flashing EZ distribution mode Child lock
- Wifi status: Disconnection Cloud icon: flashing AP distribution network mode
- Activate window function Room temp Setting temp
- Cooling mode, the icon blinking means cooling mode output







## Operation key

NO	symbols	represent
A		Turn ON/OFF: Short press to turn on/ turn off
B		1 Short press  to switch automatic mode and manual mode 2 Turn on thermostat, long press  for 3-5 seconds to enter into programmable setting 3. Turn off thermostat, long press  for 3-5 seconds to enter into advanced option A
C		1 Confirm key: use it with  key 2 Only short press to set time 3 Turn on thermostat, long press it for 3-5 seconds to holiday mode setting. Appear OFF, press  or  change to ON, then press  to confirm opening holiday mode 4 Turn off thermostat, long press it for 3-5s to enter into advanced option B

<b>D</b>		1 Decrease key 2 Long press to lock /unlock
<b>E</b>		1 Increase key ; 2 Long press to inquire external sensor temperature ( only available for BN item select N3 in the advance option B) 3 In the program model, press  or  enter to temporary manual mode
<b>F</b>	 	Press them together to enter matching wifi mode


### Programmable





5+2 (factory default),6+1 and 7 models 6 times period setting for user choose. In the advanced options choose model of you need, under power on state, long press  for 3-5 seconds enter into programming mode setting, then short press  choose: hour,minute, time period, and press  and  to adjust data, finished setting, about 10 seconds will automatic save and exist.

					
Wake up	Leave home	Back home	Leave home	Back home	Sleep
6: 00	20°C	8: 00	15°C	11: 30	15°C
		13:30	15°C	17:00	15°C
				22:00	15°C




The optimum comfort temperature is 18°C-22°C.

### Advanced option A


Power off state, long press  for 3-5 seconds to access advanced option A.





From A1 to AF, short press  to choose the option, and adjust data by  or , short press  to switch next option. Remain about 5 seconds after finish setting will quit setting.

NO	Setting Options	Data Setting Function	Factory Default
<b>A1</b>	Measure Temperature Calibration	-9-+9°C(Displayed as the corrected room temperature value)	-1
<b>A2</b>	Start/stop working temperature difference setting	0.5-2.5°C	1°C
<b>A3</b>	Children lock setting	0:half lock 1:full lock	0
<b>A4</b>	Power on/off state memory after electricity cut	0:Thermostat on/off with memory when electrify 1:Thermostat off when electrify 2:Thermostat on when electrify	0
<b>A5</b>	Standby bright	0: Off 1: Weakly bright 2: Brighter	10
<b>A6</b>	Logo display on standby	0: No display 1: Display	
<b>A7</b>	Weekly programming selection	0: 5+2 1: 6+1 2: 7	0

<b>A8</b>	Setting temperature minimum limit	1-10°C	5°C
<b>A9</b>	Setting temperature maximum limit	20-70°C	35°C
<b>AA</b>	Low temperature protection	1-10°C When setting temp = 10°C, if press  will display <b>【--】</b> , cancel low temperature protection	5°C
<b>AB</b>	High temperature protection for external sensor	20°C-70°C When setting temp =20°C, , if press  will display <b>【 -- 】</b> , cancel high temperature protection	45°C
<b>AC</b>	High temperature protection temperature difference setting	1-9°C	2°C
<b>AD</b>	Window function triggers temperature	10-20°C,setting temperature is 10°C,decrease it ,will display <b>【--】</b> ,then canceled this function	--
<b>AE</b>	Window function running time	10-20min	10
<b>AF</b>	Restore factory defaults	Display Ao , long press  key to whole show	
<b>AH</b>	Heating/Cooling mode	0: heating 1: cooling	0

### Advanced option B

Power off state, long press  for 3-5 seconds to access advanced option B.

short press  to choose the option, and adjust data by  or , short press  to switch next option. Remain about 5 seconds after finish setting will quit setting.

NO	Setting Options	Data Setting Function	Factory Default
BN	Options of sensor control	N1:Internal sensor (high temperature protection close) N2:External sensor (high temperature protection close) N3:Internal sensor control temperature ,external sensor limit temperature (external sensor detect the temperature is higher than highest temperature of external sensor, thermostat will Close relay,turn off load)	N1
BC	Descaling function	0: Disable descaling function 1: Enable descaling function	0
Bo	product information	Can't be changed	

**Return difference:** limit valve of external sensor is 45°C for factory default (A6),value of external sensor control return difference (A3) is 2. when temperature rise to 45°C,then relay stop working and will remind high temperature production alarm. If temperature decline to 43°C relay continue to work and

heating alarm will be relieved. (it can be operated ,only when room temperature is lower than setting temperature )

**Sensor fault display:** please choose correct working way of built-in and external sensor, if choose wrongly or sensor fault (breakdown), “E1” or “E2” will be displayed on the screen. Thermostat will stop heating until the fault is eliminated

**Installation diagram:**

